


REVISION HISTORY		
SYMBOL	DESC.	DATE

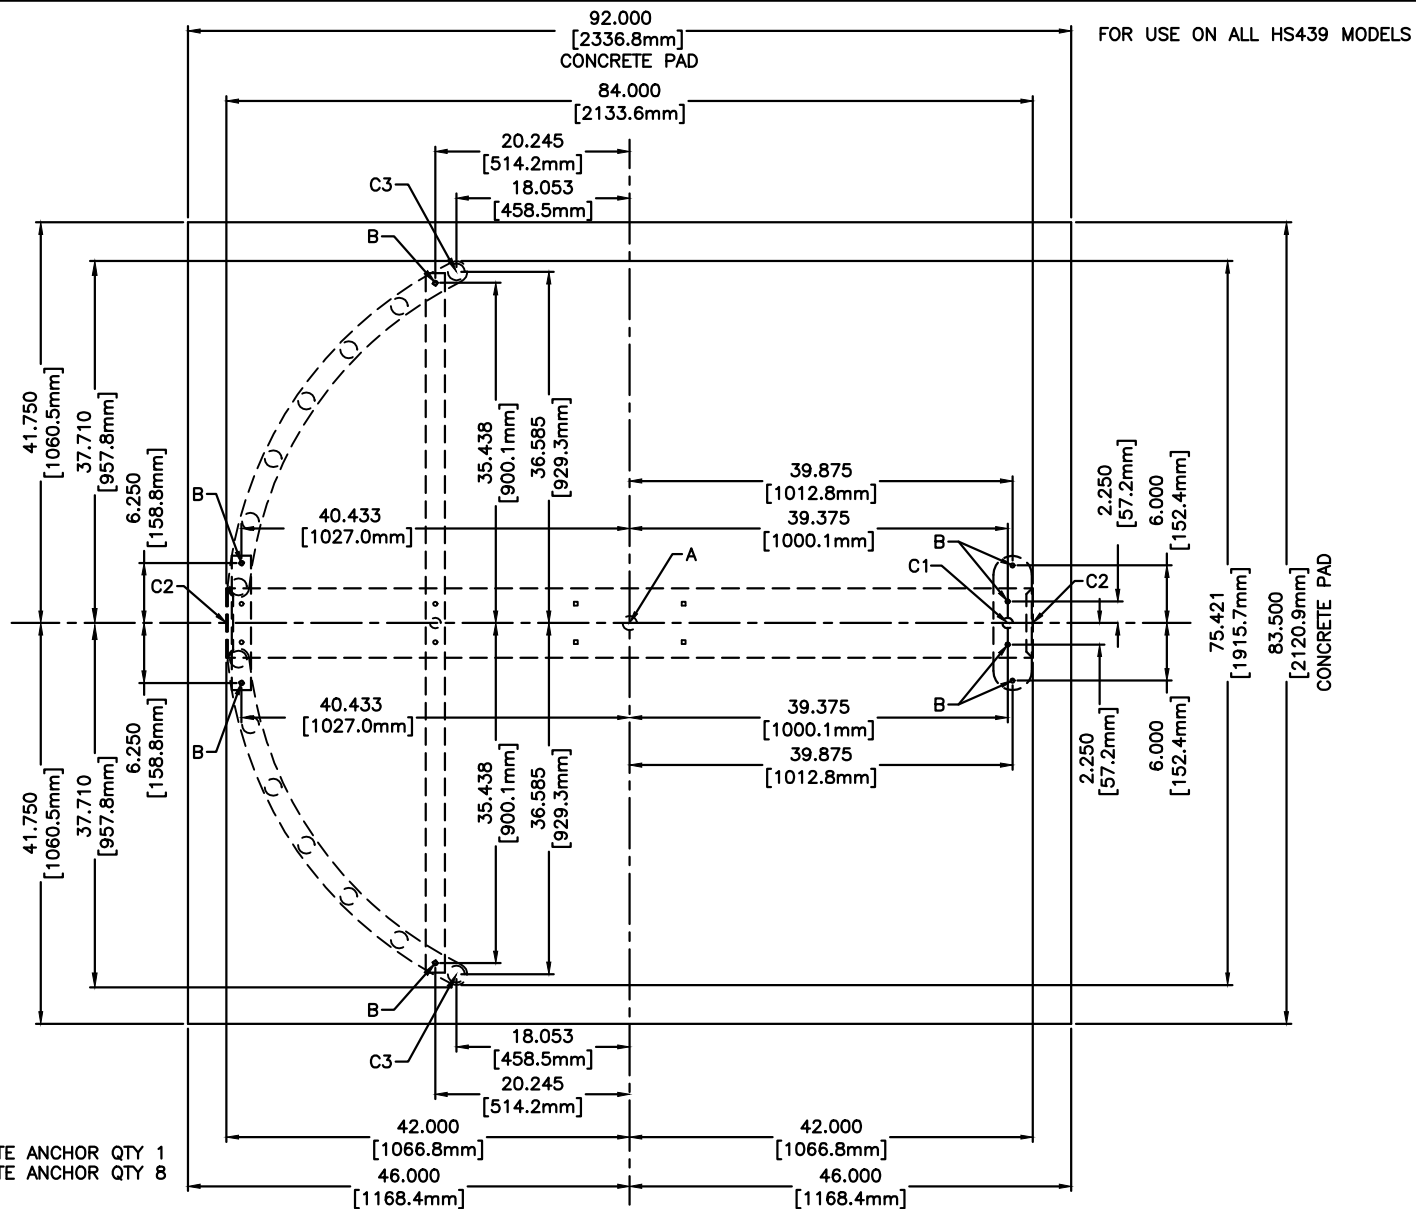

**ANCHOR POINTS**


- A=  $\emptyset$ .625 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 1
- B=  $\emptyset$ .375 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 8

**SUGGESTED CONDUIT LOCATION**

- C1 = THROUGH VERTICAL BARRIER (PREFERRED)
- C2 = THROUGH MAIN CHANNEL END CAP (TYP BOTH SIDES)
- C3 = THROUGH VERTICAL TOKE TUBE

**CONCRETE PAD NOTE:**

POUR PAD 4.000 [101.6mm] - 6.000 [152.4mm] THICK,  
AND INSURE IT IS LEVEL  $\pm$ .125 [3.1mm]

MATERIAL:	SCALE: .5=12	APPROVED BY:	DRAWN BY: LC III
N/A	DATE: 1/13/14		REVISED:
FINISH:	 <b>CONTROLLED ACCESS, INC.</b> 1636 West 130th Street Brunswick, Ohio 44212		
TOL. UNLESS OTHERWISE SPEC.	330-273-6185 FAX 330-273-4468 USA 1-800-942-0829 FAX 1-800-942-0828		
.X $\pm$ .1      .XXX $\pm$ .015	HS439 ANCHOR POINTS/CONDUIT		
.XX $\pm$ .03      ANGLES .5°			