

The Beacon™ Series Waist-High Optical Turnstiles

BE800-Z


Stainless Cabinet & Solid Surface Trapezoid End | Interior Application

The Beacon™ Series is our line of barrier-free pedestrian control devices. Using a non-restrictive method to control traffic flow, these optical units are ideally suited for office personnel entrances where the majority of the people enter using an ID card. It allows for rapid pedestrian advancement and barrier free ADA access, while preventing "tail-gating" by those without credentials.

This large profile unit is constructed of a heavy 14-gauge, 300 series satin stainless steel finish cabinet and is finished with a solid surface top (featuring trapezoid ends) to match any décor. It integrates with all standard access equipment.



BE800-Z

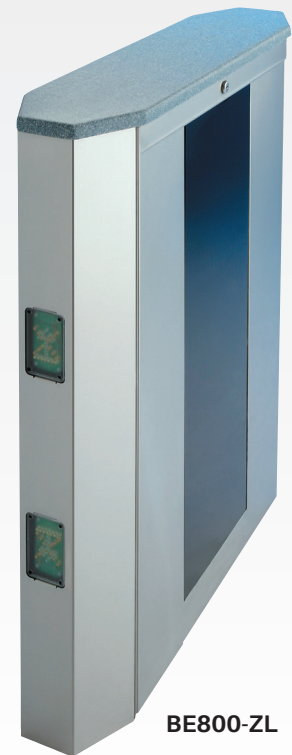

BE800-ZL

We're the #1 Choice of Top Architects, Security Pros and Engineers

For more than 30 years, Controlled Access has been the globally trusted name in pedestrian control equipment. Made in Ohio and shipped worldwide, we are the first choice of leading architects, facility managers, security consultants, and engineers. Whether your project requires high security full-height turnstiles, waist high units, or matching ADA accessible gates, Controlled Access is the secure choice. We're experienced in access control systems, from card readers to biometric scanning, to give you the power to control access.



Standard top selections include:

Listed color selections are current (as of 2/6/23). Top selections are subject to availability.



Flurries



Lake Michigan



Obsidian



Peach Freeze



Concrete



Pewter



Spanish Moss



Whole Wheat



Autumn



Crushed Almond



1535 Industrial Parkway South, Brunswick, OH 44212

PH: 330.273.6185 | Fax: 330.273.4468
Toll-Free Ph: 800.942.0829 | Toll-Free Fax: 800.942.0828
E-mail: sales@controlledaccess.com
www.controlledaccess.com

The Beacon™ Series Waist-High Optical Turnstiles **BE800-Z**

Stainless Cabinet & Solid Surface Trapezoid End | Interior Application

Applications:

This interior application barrier free optical unit features our signature 304 stainless steel/No. 4 satin finish cabinet with a trapezoid-shaped end and solid surface top. It is ideally suited for office personnel entrances where the majority of people enter using an ID card.

Product Overview:

Our barrier free optical turnstile lanes operate with through-beam type sensors to provide accurate monitoring of lane status. To this end, each lane requires a primary cabinet (receivers & logic controller) and secondary cabinet (transmitters). Hybrid cabinets (primary on one side and secondary on the other) are also available to allow multiple lanes per array of cabinets.

Each lane has two main zones comprised of a series of sensors to grant alarm-free passage or detect unauthorized access and "tail-gating" in either direction of travel.

In addition, crawl-detection sensors exist in the lower section of each cabinet to give additional security. In facilities where excessive low to the ground traffic is frequent, such as gyms with members dragging rolling bags, this feature can be disabled if desired.

Product Features:

Materials and Finishes:

- **Lid:** A solid surface (or wood) top with your choice of 12 standard colors selections. Custom colors and Corian® can be quoted
- **Cabinet:** Our signature 304 stainless steel/No. 4 satin finish

Design & Construction:

- Designed for secure and reliable operation with aesthetics in mind
- Bollard construction is our 304 stainless steel/No. 4 satin finish
- Designer tops are available in a wide variety of solid surface colors to match your interior design needs
- Dark tinted tempered glass provides a sleek appearance while concealing inner components

Optical Features:

- Optical sensors provide for passage for up to 30 people/minute
- Powerful through-beam sensors which exceed sensing distance to ensure proper functionality
- LED graphic arrays to indicate direction status
- Optical sensors to prevent unauthorized "crawling" thru lane
- Can be configured for controlled passage in one or both directions, with free or no passage in the other via settings on the logic controller
- Alarm condition provides audible tone as well as solid state output for integration into other systems

Installation:

- Dual-axis sensor alignment with visible target to ensure a simplified and reliable installation
- Nearly universal integration to any number of access control systems
- Low voltage (24VDC) requirements to secondary cabinet reduce conduit requirements
- Flexibility in passage widths: from 22" to 38"


Options:

- Corian®, wooden or other alternate top choices outside of our standard selection
- Indicator lights mounted in trapezoid ends (BE800-ZL)
- Additional options available upon request

Dimensions:

- **Height:** 38.925" (988.7mm)
- **Width:** 8.875" (225.4mm)
- **Depth:** 36.750" (933.4mm)

* Dimensions are subject to change without notice

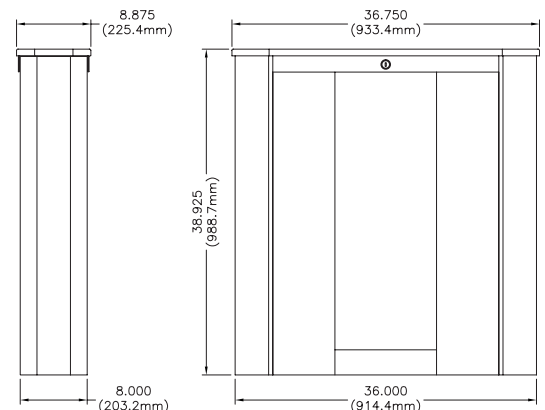

* Dimensions are approximate

Warranty:

Units are warranted against defects in materials and workmanship for a period of two years from date of delivery. See warranty information for specific details.

Electrical Specifications:

Input Voltage: 100-240 VAC
Operating Voltage: 24VDC
Operating Current: 15W per lane
Direction Inputs: Contact Closure (Normally Open, Dry)

Standards and Codes:

Austenitic stainless steel:
ASTM A240, A249, A276

All fasteners provided meet IFI ANSI/
ASME Fastener Standards

American Welding Society (AWS)
Standard D 1.1



Controlled Access, Inc. is certified
by Advantage International Registrar
to be an ISO 9001:2015 company