

# Full Height Aluminum ADA Door

## Manual or Electronic Passage Gate | Interior Application

T36-ADA



The T36-ADA is a solution for projects requiring an aesthetically pleasing interior security door. This self-closing unit provides wheelchair accessible 36" passage width (overall width 40"). It is a "heavy-duty" stile and rail door that can withstand high traffic and abuse. Its low voltage strike lock can be used mechanically or electronically depending on your needs. The T36-ADA is normally paired with the T80-Single, T80-Tandem, P60 or RD70 aluminum-polycarbonate turnstile portals.



Sample Application:  
T80-T and T36-ADA door



T36-ADA

### We're the #1 Choice of Top Architects, Security Pros and Engineers

For more than 30 years, Controlled Access has been the globally trusted name in pedestrian control equipment. Made in Ohio and shipped worldwide, we are the first choice of leading architects, facility managers, security consultants, and engineers. Whether your project requires high security full-height turnstiles, waist high units, or matching ADA accessible gates, Controlled Access is the secure choice. We're experienced in access control systems, from card readers to biometric scanning, to give you the power to control access.



Hydraulic door closer included



Optional Push Bar available for free exit configurations. Can be ordered with a battery alarm or electronic switch if needed



**Controlled Access, Inc.**  
Turnstiles and ADA Gates

1535 Industrial Parkway South, Brunswick, OH 44212

PH: 330.273.6185 | Fax: 330.273.4468  
Toll-Free Ph: 800.942.0829 | Toll-Free Fax: 800.942.0828  
E-mail: [sales@controlledaccess.com](mailto:sales@controlledaccess.com)  
[www.controlledaccess.com](http://www.controlledaccess.com)

# Full Height Aluminum ADA Door

## Manual or Electronic Passage Gate | Interior Application

T36-ADA



### Applications:

Ideal for controlling orderly flow of foot traffic in indoor/outdoor settings where ADA passage width is required.

### Product Features:

#### Materials & Finishes:

- Heavy duty anodized aluminum extrusions
- 1/4" tempered glass
- Door handle
- Finish: Standard anodizing finish is clear. Also available in dark bronze

#### Hardware:

- Hydraulic Closer: Norton 9300 Series with aluminum finish
- Electronic Strike: Adams Rite 7100 Series, 24VDC
- Deadlatch: Adams Rite 4510 Series with 1.5" Backset
- Cylinder: Schlage C keyway - standard (SFIC available)

### Design & Construction:

- Designed for secure operation with aesthetics in mind
- Minimally exposed hardware
- Continuous hinge

### Options:

- Magnetic lock (replaces strike)
- Push buttons (wired or wireless)
- Motorized door opener  
(Norton 5730 Low Energy Operator, aluminum)  
(Interior applications only)  
(Requires 110VAC)
- Push to exit panic bar by Adams Rite 8400, aluminum

### Dimensions:


- **Size of opening (pedestrian clearance):** 36" (914.4mm)
- **Interior Height:** 86.5" (2197.1mm)
- **Exterior Height:** 91" (2311.4mm)
- **Overall Width:** 40" (1016mm)

\* Dimensions are subject to change without notice

### Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

**Pairs well with our full-height aluminum turnstiles (see model RD70, P60, T80-S, and T80-T)**

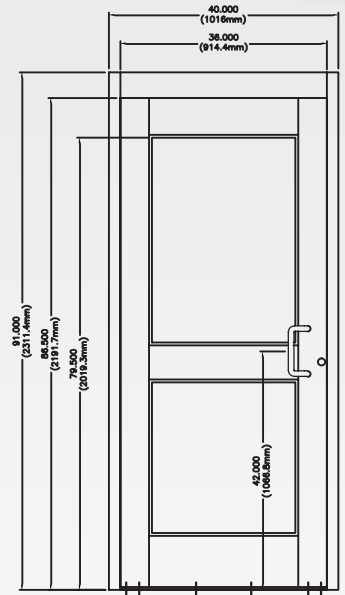

\* Dimensions are approximate

### Electrical Specifications:

UL Listed Electronic Strike:  
Input Voltage: 24VDC  
Input Current: 170 mA

### Standards and Codes:

Austenitic stainless steel:  
ASTM A240, A249, A276

Hot rolled steel:  
AISI C-1020, AISI C-1018

Hot dipped galvanizing:  
ASTM A-143, ASTM A-153-80

All fasteners provided meet IFI ANSI/  
ASME Fastener Standards

American Welding Society (AWS)  
Standard D 1.1



RD70 and T36-ADA door



P60 and T36-ADA door



Controlled Access, Inc. is certified by Advantage International Registrar to be an ISO 9001:2015 company