FOR USE ON GALVANIZED OR POWDER COATED
HS430-S MODELS

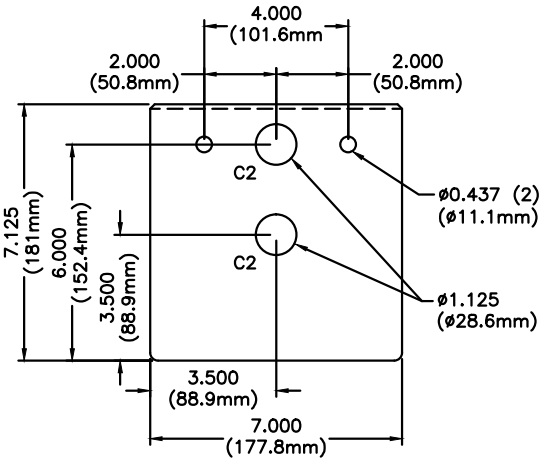

MAIN CHANNEL END CAP

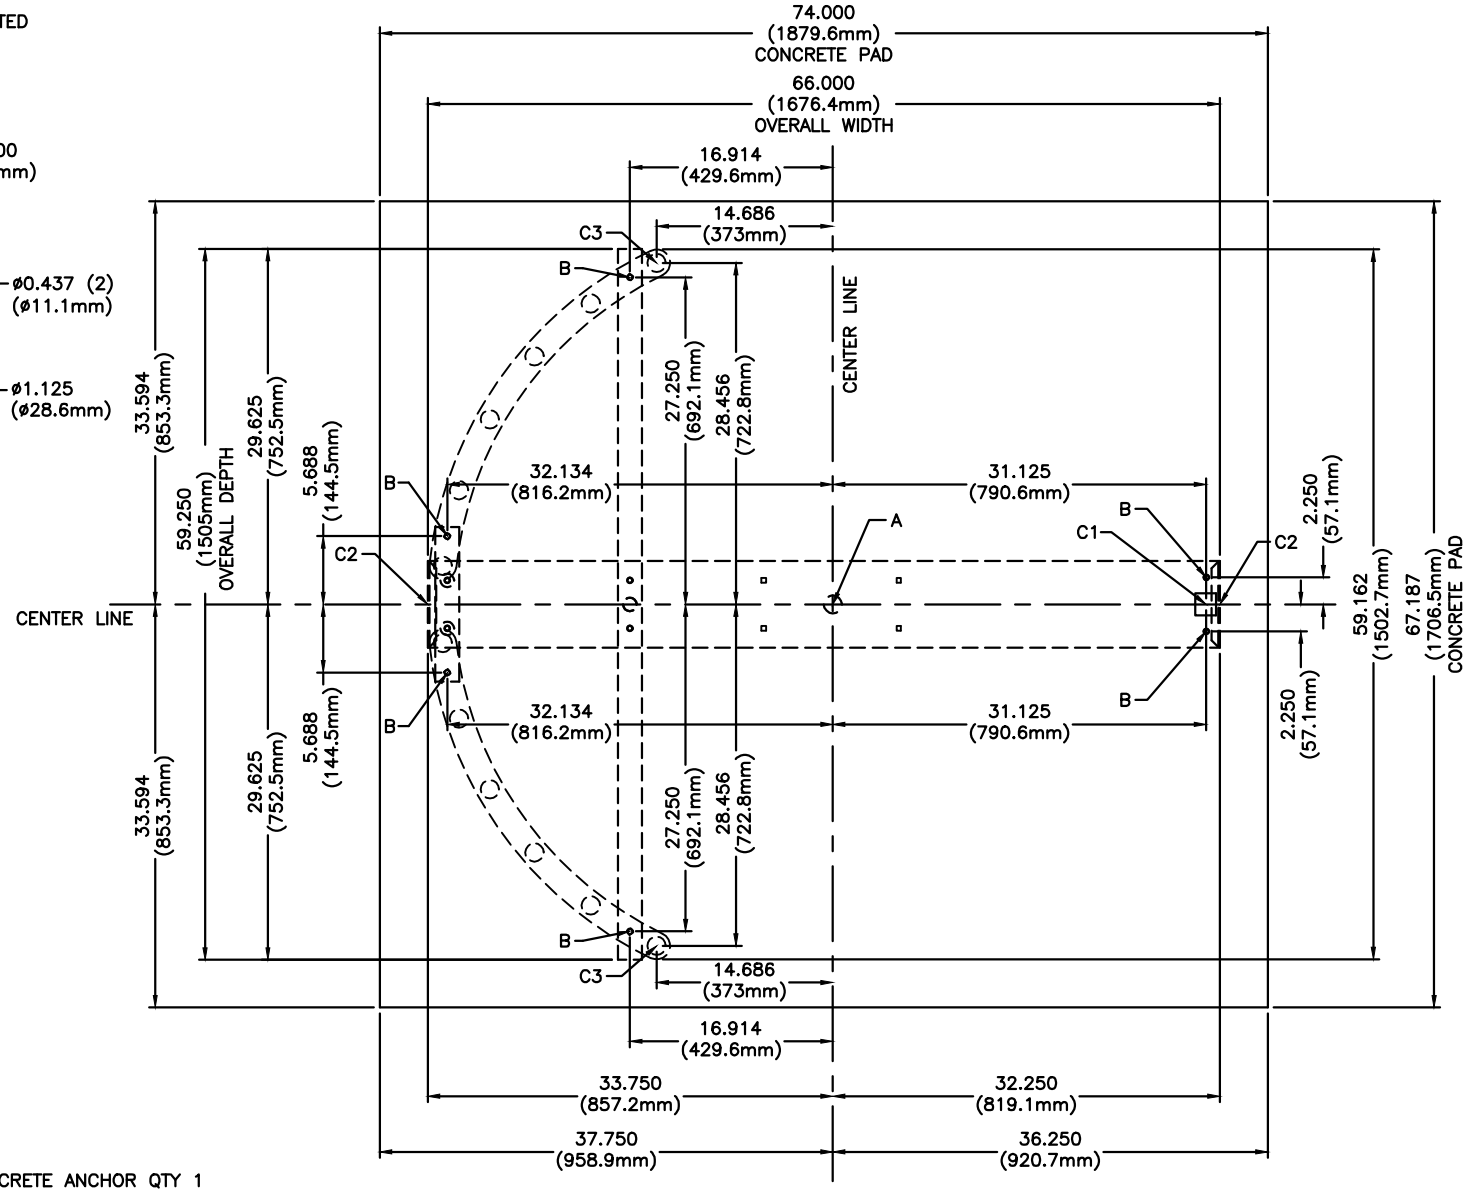

ANCHOR POINTS
A = ø.625 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 1
B = ø.375 X 4.500 STAINLESS STEEL CONCRETE ANCHOR QTY 6

SUGGESTED CONDUIT LOCATION
C1 = THROUGH VERTICAL BARRIER (PREFERRED)
C2 = THROUGH MAIN CHANNEL END CAP (TYP BOTH SIDES)
C3 = THROUGH VERTICAL YOKE TUBE

CONCRETE PAD NOTE:
POUR PAD 4.000 (101.6mm) – 6.000 (152.4MM) THICK,
AND ENSURE IT IS LEVEL ±.125 (3.1mm)

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING IS THE PROPERTY OF CONTROLLED ACCESS, INC., AND CONTAINS PROPRIETARY INFORMATION, IT MAY NOT BE COPIED, REPRODUCED OR TRANSMITTED IN ANY MATTER TO A THIRD PARTY WITHOUT PRIOR WRITTEN PERMISSION OF CONTROLLED ACCESS, INC.

MATERIAL: N/A	SCALE: 1=16	APPROVED BY:	DRAWN BY: LC III
	DATE: 1/13/14		REVISED: 10/2018
FINISH:	TOL. UNLESS OTHERWISE SPEC. .X ± .1 .XXX ± .015 .XX ± .03 ANGLES .5°		

CONTROLLED ACCESS, INC.
1636 West 130th Street
Brunswick, Ohio 44212
330-273-6185
FAX 330-273-4468
USA 1-800-942-0829
FAX 1-800-942-0828

HS430-S GV\PC ANCHOR POINTS\CONDUIT 2018